




## BARRIER KERB

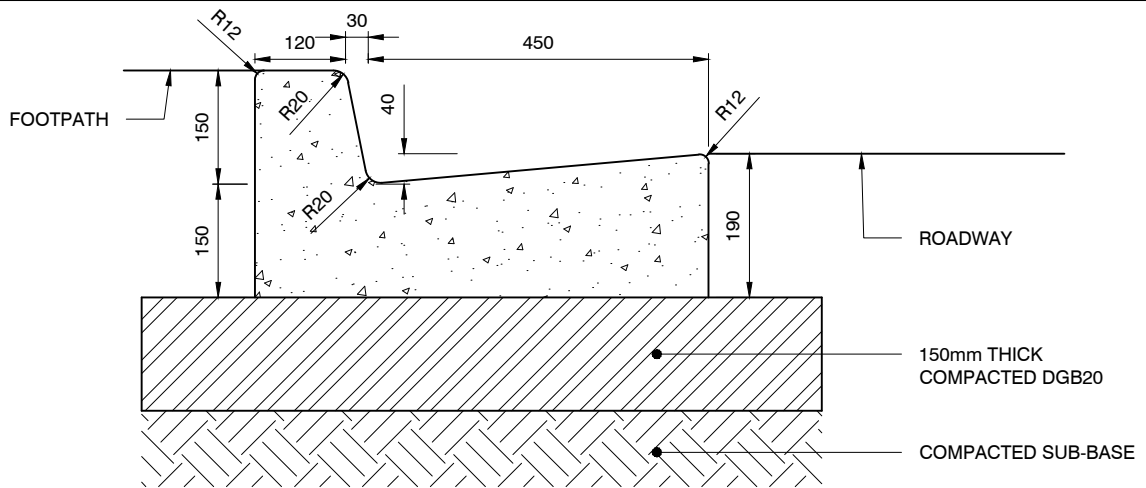


## DISH CROSSING

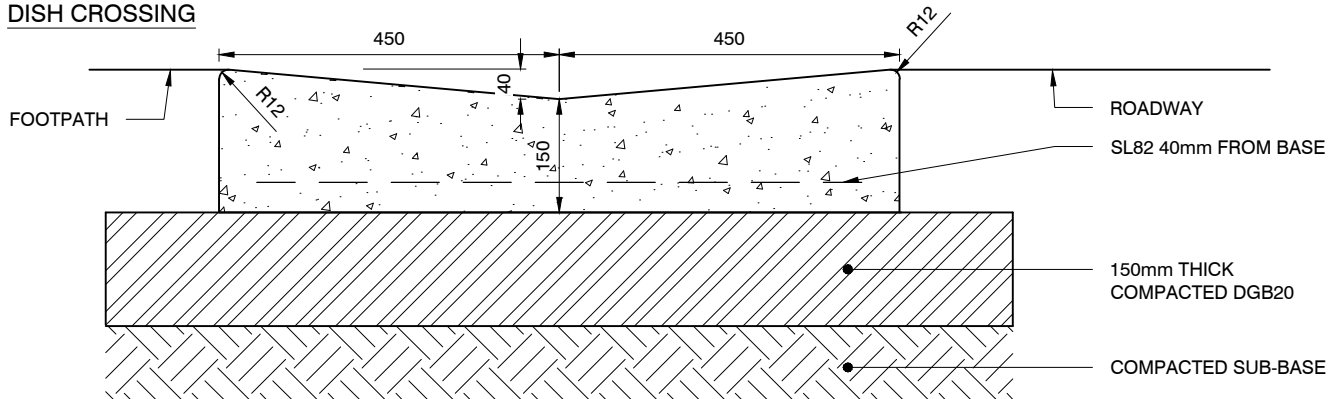

## ROLL KERB

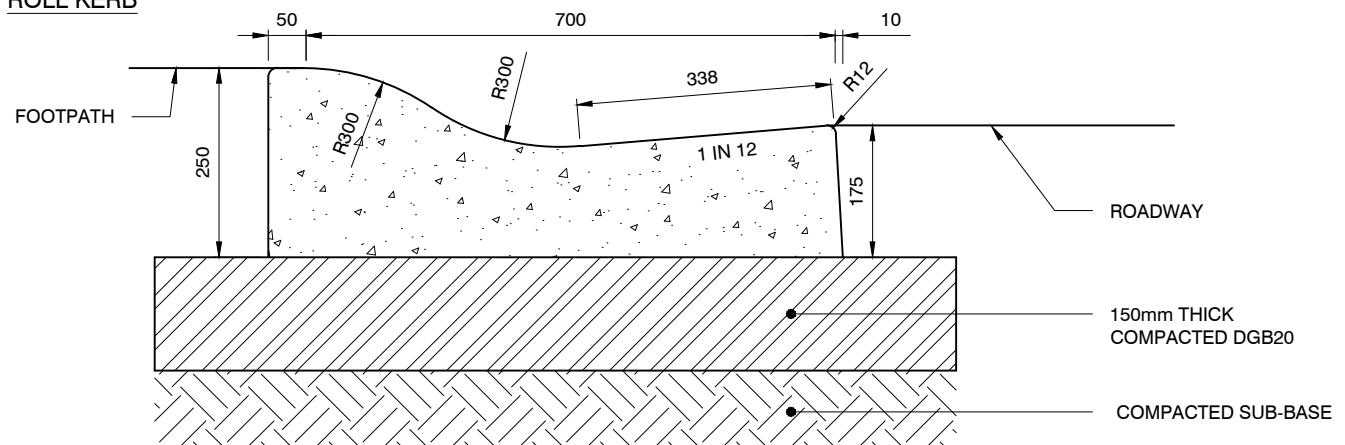

## MOUNTABLE KERB

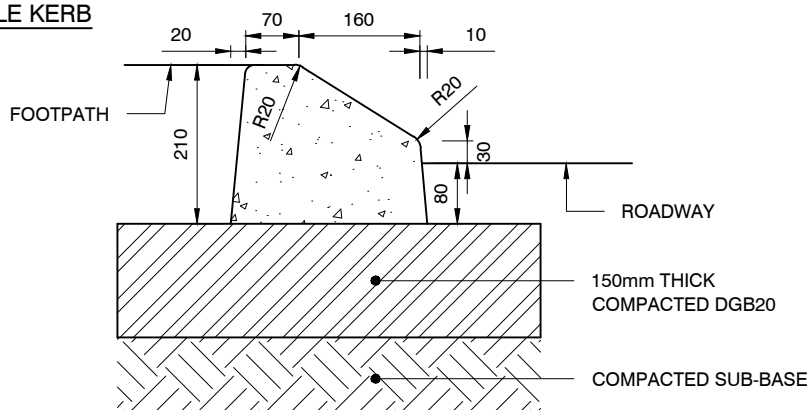

### NOTES:

1. ALL KERBS TO BE MIN 25MPa CONCRETE UNLESS NOTED OTHERWISE.
2. WHERE THE GUTTER IS SUBJECTED TO HIGHLY REPETITIVE MEDIUM AND HEAVY TRAFFIC, THE GUTTER SHALL BE 200mm THICK IN ACCORDANCE WITH B4 - 4.3.3
3. ALL EDGES SHALL BE TOOL FINISHED WITH 12mm RAD 50mm WIDE EDGING TOOL.
4. EXPANSION JOINTS SHALL BE PLACED AT 15m INTERVALS AND THE INTERFACE WITH OTHER FIXED STRUCTURES.
5. FOR ROAD RESTORATION ADJACENT TO KERB REFER TO STD DRG # 1.1.16
6. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.

SCALE 1:10