

PAVER SIZES

TYPE A: 600 x 400 x 60mm
 TYPE B: 450 x 400 x 60mm
 TYPE C: 300 x 400 x 60mm
 TYPE D: SPECIAL CUT

KERB TYPES:


TYPE K(F): FULL HEIGHT
 TYPE K(V): VEHICULAR CHAMFERED TO FALL
 TYPE K(V): VEHICULAR CROSSOVER

NOTES:

1. DRIVEWAY TO BE GENERALLY PERPENDICULAR TO KERB LINE, UNLESS APPROVED OTHERWISE.
2. VERTICAL AND HORIZONTAL CLEARANCE SHALL BE CHECKED BY THE DESIGNER IN ACCORDANCE WITH AS2890.1.
3. FOR NARROW FOOTPATHS, LENGTH OF RAMP TO BE REDUCED TO 900mm SUBJECT TO VEHICLE CLEARANCE.
4. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.

PLAN

1:50

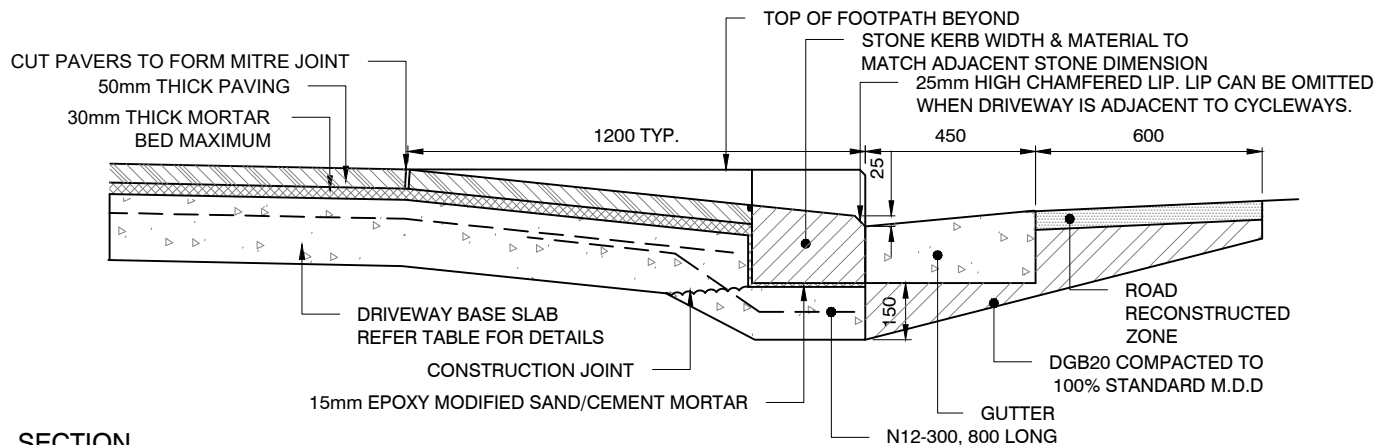

SECTION

1:20

DRIVEWAY SPECIFICATIONS			
DRIVEWAY USE	CONCRETE STRENGTH	THICKNESS	REINFORCEMENT
SINGLE RESIDENTIAL	32MPa	150	SL82, 50 TOP COVER
MULTI RESIDENTIAL	32MPa	200	SL82, 50 TOP COVER
COMMERCIAL/ INDUSTRIAL	32MPa	250	TWO LAYERS SL82 50 COVER TOP & BOTTOM