


## NOTES:

- 1. DRIVEWAY TO BE GENERALLY PERPENDICULAR TO KERB LINE, UNLESS APPROVED OTHERWISE.
- 2. FOR NARROW FOOTPATHS, LENGTH OF LAYBACK TO BE REDUCED TO 900mm, SUBJECT TO VEHICLE CLREARE OR LAYBACK ONLY TO BE USED IN APPROVED APPLICATIONS.
- 3. FOR DRIVEWAYS WIDER THAN 6.0m A TOOL JOINT SHALL BE PROVIDED ALONG THE CENTRE OF THE DRIVEWAY.
- 4. CONCRETE TO BE MINIMUM 32MPA.
- 5. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.

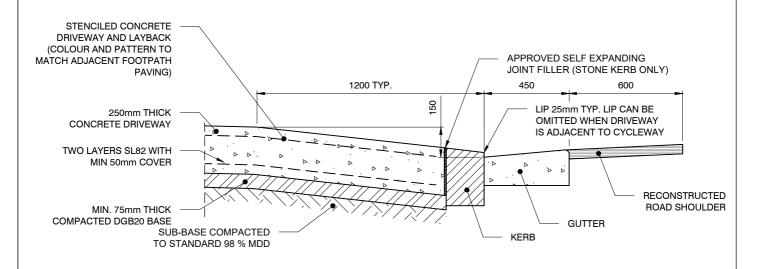

SECTION 1:20

CITY OF SYDNEY **(** 

BRICK PAVING
COMMERCIAL/INDUSTRIAL VEHICULAR CROSSING

FOOTWAYS

E Dwg No.

 Date
 16.11.22

 Approved
 S A

Rev

2.4.8