



PLAN
1:50

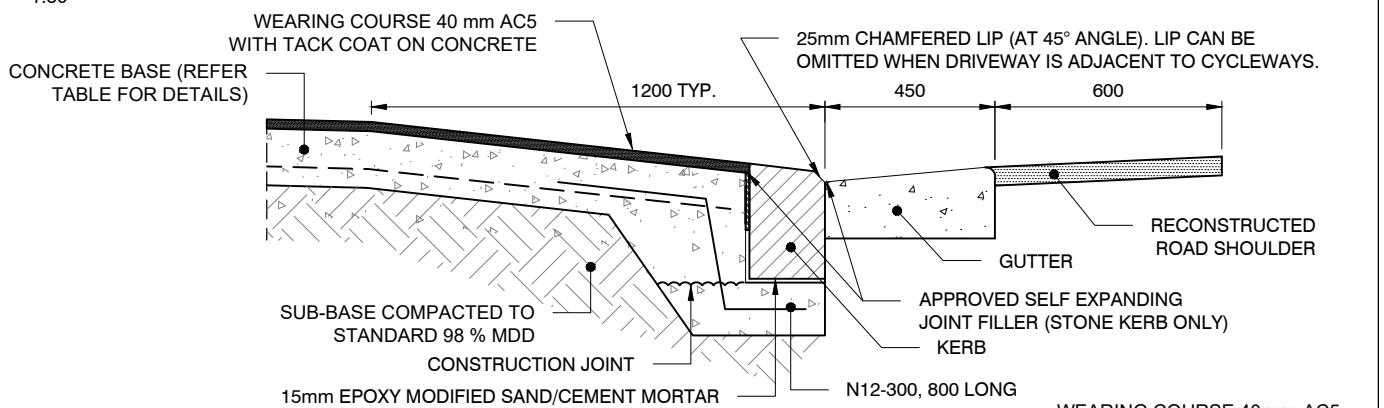

SECTION (WITH STONE KERB)

1:20

DRIVEWAY SPECIFICATIONS			
DRIVEWAY USE	CONCRETE STRENGTH	THICKNESS	REINFORCEMENT
SINGLE RESIDENTIAL	32MPa	150	SL82 50 TOP COVER
MULTI RESIDENTIAL	32MPa	200	SL82 50 TOP COVER

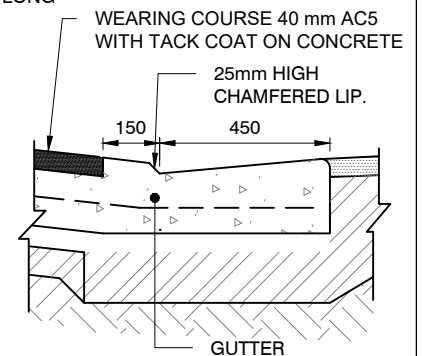

SECTION (WITH CONCRETE KERB)

1:20

NOTES:

1. DRIVEWAY TO BE GENERALLY PERPENDICULAR TO KERB LINE, UNLESS APPROVED OTHERWISE.
2. FOR NARROW FOOTPATHS, LENGTH OF LAYBACK TO BE REDUCED TO 900mm, SUBJECT TO VEHICLE CLEARANCE OR LAYBACK ONLY TO BE USED IN APPROVED APPLICATIONS.
3. DRIVEWAY TO BE GENERALLY PERPENDICULAR TO KERB LINE, UNLESS APPROVED OTHERWISE.
4. VERTICAL AND HORIZONTAL CLEARANCE SHALL BE CHECKED BY THE DESIGNER IN ACCORDANCE WITH AS2890.1.
5. CONCRETE TO BE MINIMUM 32MPa.
6. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.