



**PLAN**  
1:50

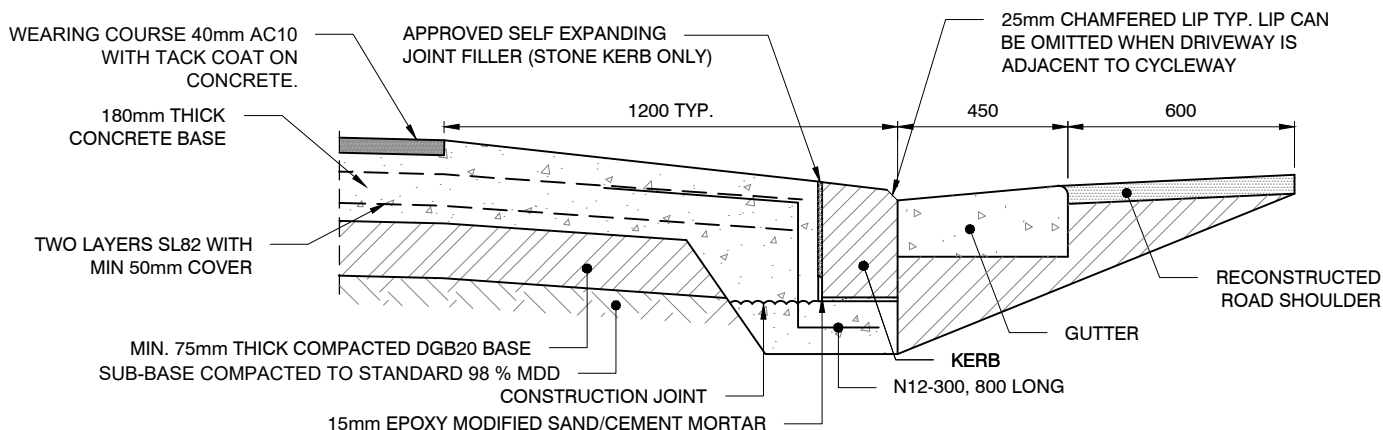

**SECTION ( WITH STONE KERB)**  
1:20

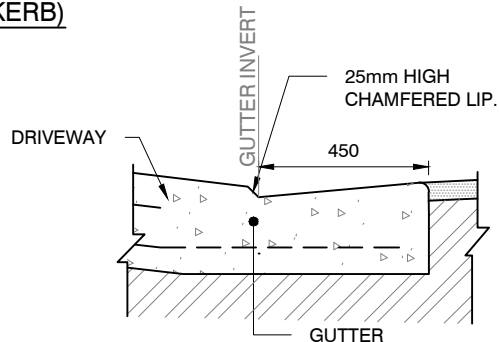

**SECTION ( WITH CONCRETE KERB)**  
1:20

**NOTES:**

1. THIS DRIVEWAY SUIT COMMERCIAL VEHICULAR CROSSINGS SUBJECT TO AXLE LOADING OF 10 TONNES OR LIGHTER.
2. DRIVEWAY TO BE GENERALLY PERPENDICULAR TO KERB LINE, UNLESS APPROVED OTHERWISE.
3. VERTICAL AND HORIZONTAL CLEARANCE SHALL BE CHECKED BY THE DESIGNER IN ACCORDANCE WITH AS2890.1.
4. FOR NARROW FOOTPATHS, LENGTH OF RAMP TO BE REDUCED TO 900mm, SUBJECT TO VEHICLE CLEARANCE OR LAYBACK ONLY TO BE USED IN APPROVED APPLICATIONS.
5. FOR DRIVEWAYS WIDER THAN 6.0m A TOOL JOINT SHALL BE PROVIDED ALONG THE CENTRE OF THE CONCRETE DRIVEWAY.
6. CONCRETE TO BE MINIMUM 32MPa.
7. TYPE OF KERB TO SUIT SYDNEY STREET CODE.
8. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.