



TGSI /TACTILE INDICATORS MATERIAL

Item	Base Surface	Background Surface	Tactile Type
1	Granite	Granite	Stainless Steel
2	Brick Pavers	Concrete	Stainless Steel
3	Concrete Pavers	Concrete/Concrete Pavers ⁽⁴⁾	Stainless Steel
4	Asphalt	Concrete	Stainless Steel
5	Concrete	Concrete coloured in with black oxide	Stainless Steel

PLAN

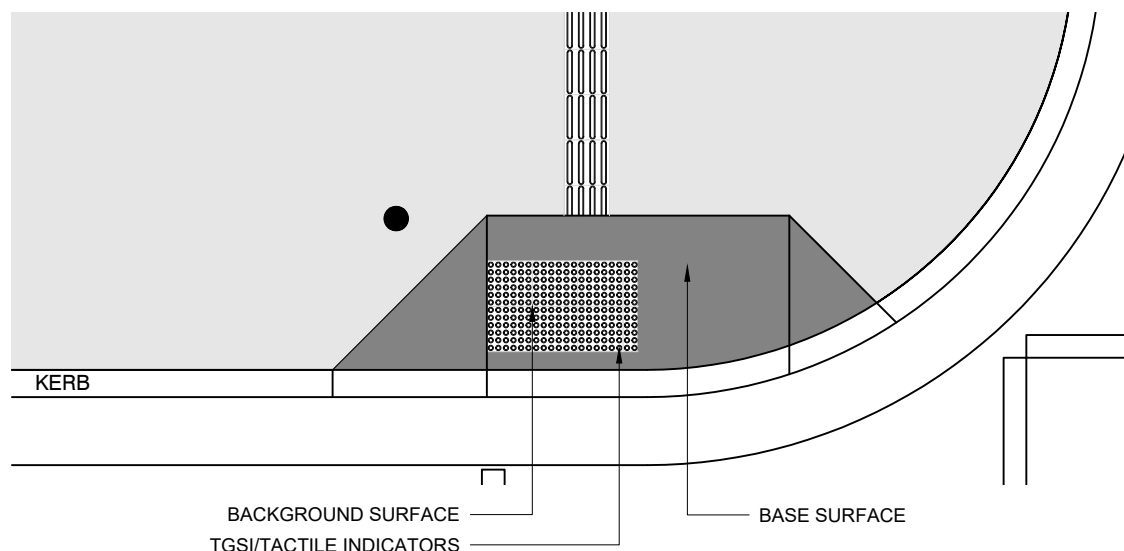

TGSI INSTALLATION DETAIL FOR CONCRETE PAVERS/BRICK PAVERS/ ASPHALT

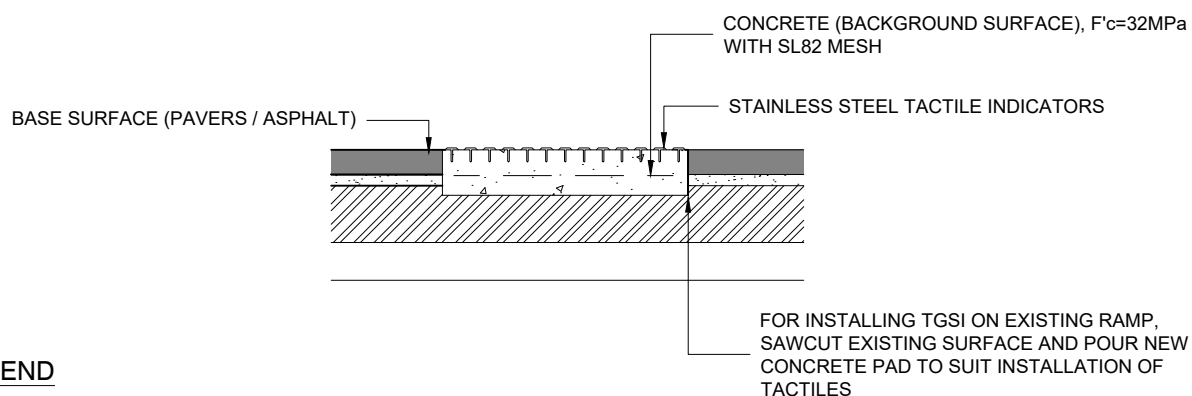

LEGEND



WARNING TGSI



DIRECTIONAL TGSI

NOTES:

1. TYPE AND COLOUR OF TGSI'S SHALL BE IN ACCORDANCE WITH THIS DRAWINGS UNLESS SPECIFIED FOR THE PROJECT. REFER TO DRAWINGS #2.7.1, #2.7.2 AND #2.7.3 FOR TYPICAL LAYOUT OF TGSI INSTALLATION.
2. DIFFERENT COLOURS AND TYPES OF TGSI'S MAY BE USED FOR SPECIFIC PROJECTS, IN WHICH CASE CITY OF SYDNEY'S APPROVAL MUST BE OBTAINED PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES.
3. WHERE THE BASE SURFACE IS CONCRETE, THE BACKGROUND COLOUR SHALL BE BLACK. EXTENT OF THE BLACK COLOUR SHALL MATCH TGSI'S BLOCK. PLEASE NOTE THAT THE BASE COLOUR SHALL REMAIN AS NATURAL CONCRETE COLOUR.
4. TGSI'S MAY BE INSTALLED ON CONCRETE PAVERS, IF IT COMPLIES WITH LUMINANCE CONTRAST REQUIREMENT SET IN AS 1428.4.1
5. WARNING TGSI'S ONLY TO BE USED ON KERB RAMPS WHERE THE GRADIENT IS SHALLOWER THAN 1:8.5 OR WHERE A NEED IS DEEMED TO EXIST AS PER AS 1428.4.1
6. EXTENT OF THE TGSI'S MAY VARY TO SUIT ANY SPECIFIC DESIGN PENDING CITY'S APPROVAL.
7. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.