
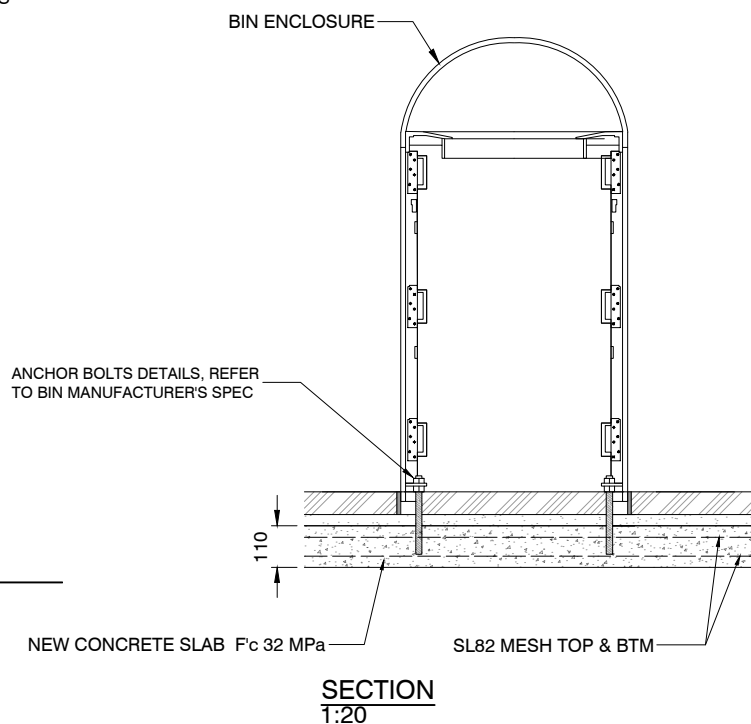


VIEWS

1:20

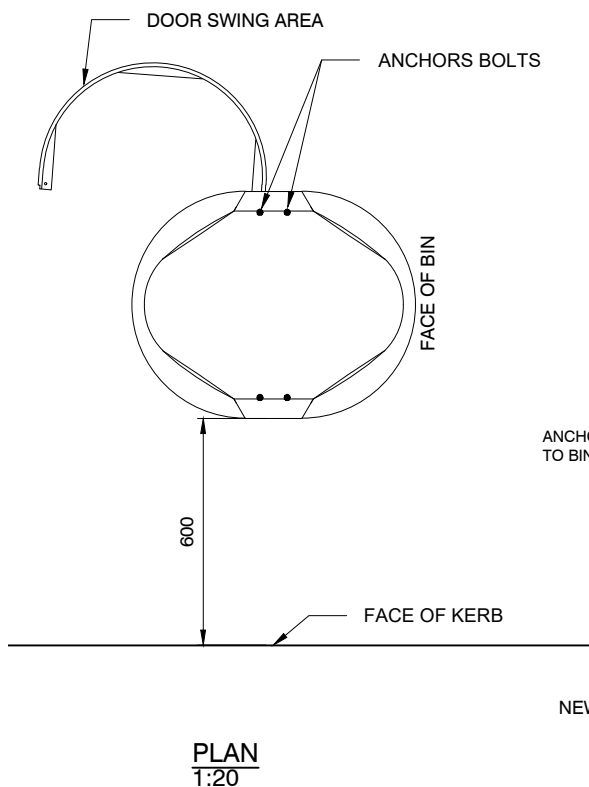

NOTES:

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.
2. ALL CONCRETE COVER TO BE 30 mm.
3. ALL HOLDING DOWN BOLTS, BASE PLATE AND BIN DETAILS, REFER TO MANUFACTURER'S SPECIFICATIONS.
4. IF ANCHORING TO AN EXISTING CONCRETE SLAB, ENSURE SLAB IS MINIMUM 110 mm THICK. IF SLAB THICKNESS IS LESS THAN 110 mm, REFER TO STD DRG # 4.3.3
5. REFER TO CITY OF SYDNEY TECHNICAL SPECIFICATIONS FOR ALL WORKS.