
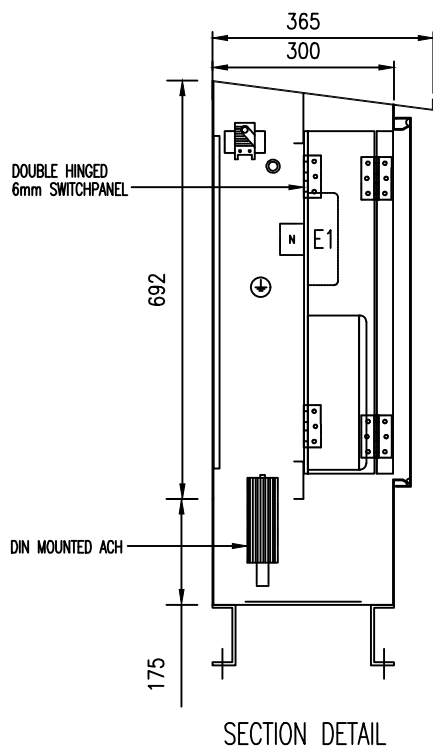


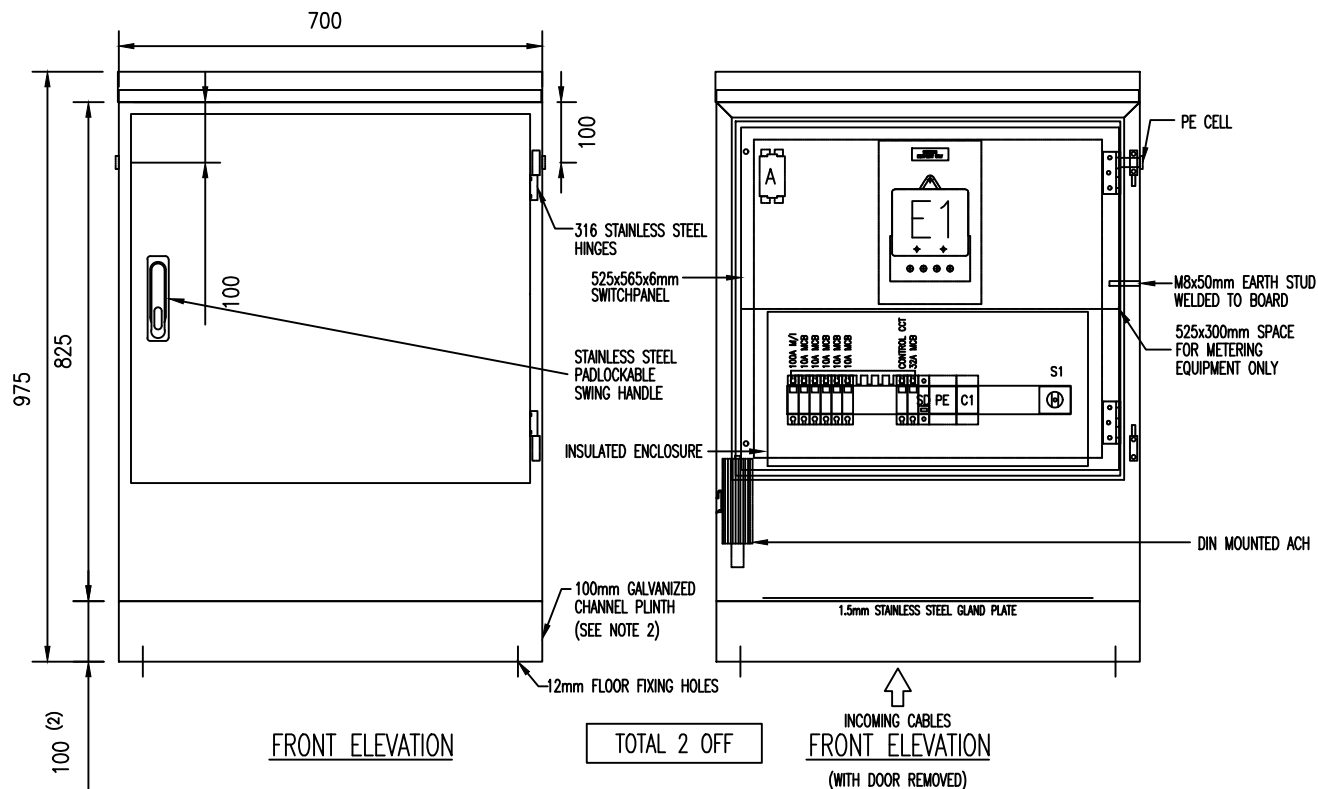

CONSTRUCTION NOTES:

CABINET:

1.5mm STAINLESS STEEL 316 GRADE

DOOR:

1.5mm STAINLESS STEEL 316 GRADE

PLINTH:

75mm x 38mm MILD STEEL CHANNEL

ESCUTCHEON & GEAR PAN:

1.5mm STAINLESS STEEL 316 GRADE

GLAND PLATES:

1.5mm STAINLESS STEEL 316 GRADE

FORM OF SEGREGATION:

FORM 1

DEGREE OF PROTECTION:

IP-66 - REFER TO WEATHER PROOFING DETAIL

FAULT RATING:

6KA

FINISH:

DE-SCALE & DE-GREASE

PREPARATION:

GRAIN FINISH

EXTERNAL COLOUR:

GRAIN FINISH

INTERNAL COLOUR:

GLOSS WHITE

BRACKETS:

HOT DIP GALVANISED

PLINTH:

ENGRAVED PLASTIC LAMINATE

LABELS:

DOUBLE SIDED ADHESIVE & SCREW FIXED

FIXING:

MAIN ISOLATOR - WHITE LETTERS ON BLACK

COLOUR:

WARNING, FIRE & LIFTS - WHITE LETTERS ON RED

OTHERS - BLACK LETTERS ON WHITE

CONTROL WIRING:

MINIMUM 1.5mm Cu V90

WIRE MARKERS:

SMB HARVAL STANDARD FERRULES

TERMINATIONS:

BARE CABLE ENDS. WHERE TERMINALS REQUIRE LUGS, BOOTLACE FERRULES


OR PRE-INSULATED RING LUGS.

240V AC - PHASE COLOURED

NEUTRAL - BLACK

EARTH - GREEN/YELLOW

AC CONTROL CIRCUIT ACTIVE- RED



NOTES:

1. TO BE READ IN CONJUNCTION WITH DRAWING 5.1.8
2. 75 mm GALVANIZED CHANNEL PLINTH MAY BE USED WITH CONCRETE / ASPHALT PAVING
3. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.