
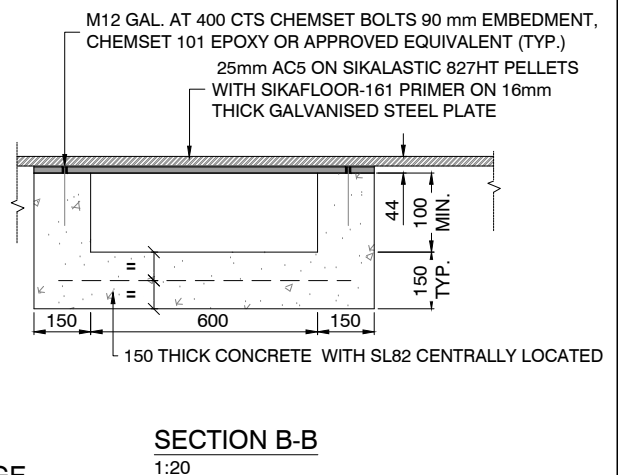


CONCRETE GUTTER BRIDGE

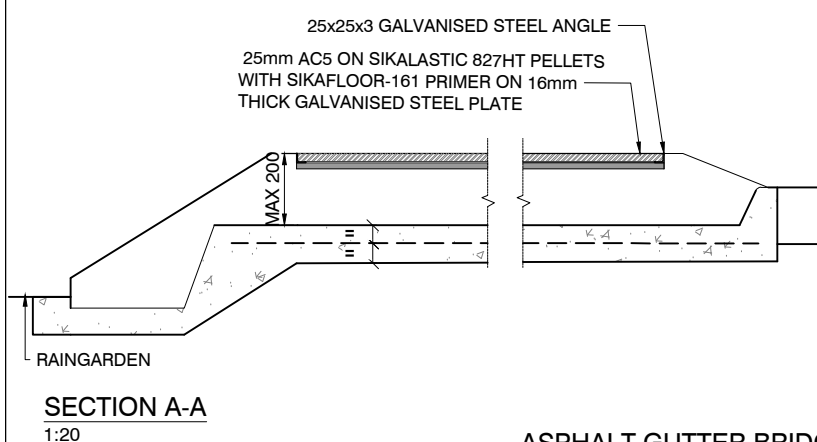

ASPHALT GUTTER BRIDGE

NOTES:

- GUTTER BRIDGE SHALL BE DESIGNED TO SUIT MINIMUM 5 YEARS ARI STORM. DESIGNER SHALL SUBMIT MAINTENANCE REGIME WITH ANY RAINGARDEN INCORPORATED IN DESIGN.
- USE OF BONDEK IS NOT ALLOWED FOR GUTTER BRIDGES.
- SIZE OF GUTTER BRIDGE SHALL BE DESIGNED TO SUIT THE ANTICIPATED FLOW RATES
- COMPRESSIVE STRENGTH OF CONCRETE AT 28 DAYS TO BE 32MPa.
- CONCRETE STRUCTURES & REINFORCEMENT TO COMPLY WITH AS 3600, AS 4671 & CoS TECHNICAL SPECIFICATIONS.
- ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED