



EXPANSION JOINT (EJ)

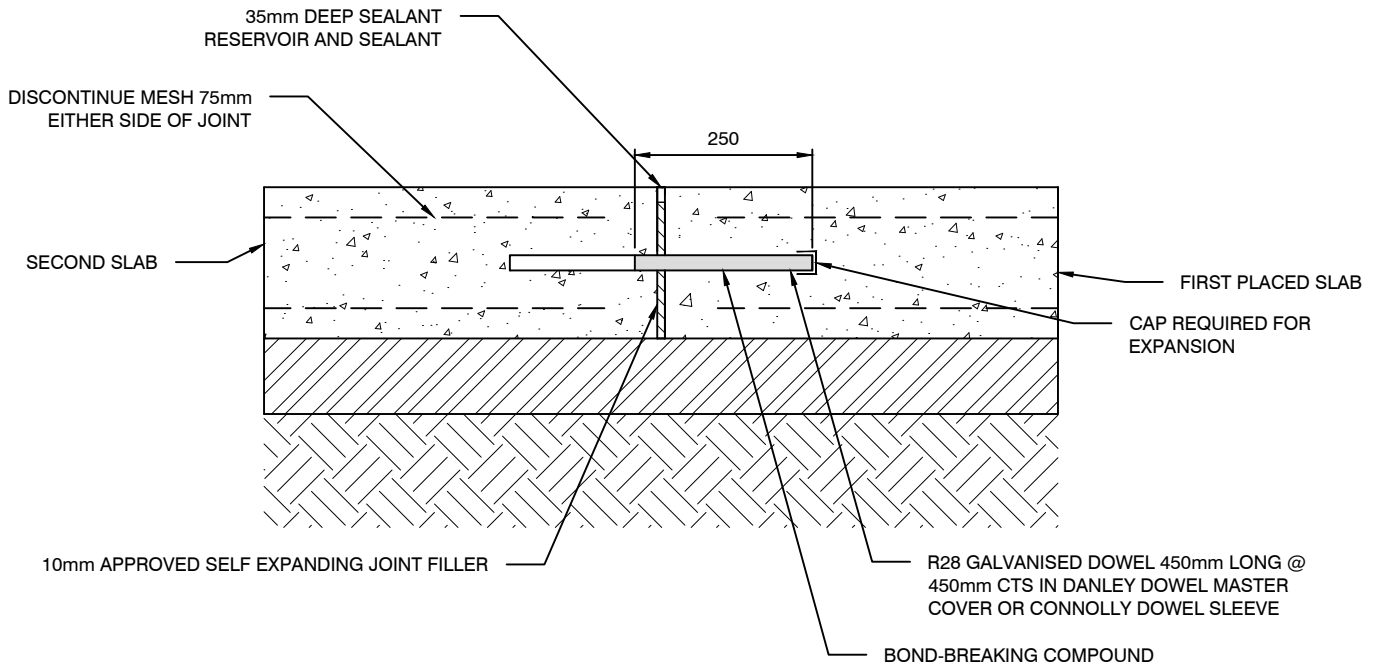

CONTRACTION JOINT/CONTROL JOINT (CJ)

10mm WIDE SAW CUT. DEPTH TO EQUAL $\frac{1}{3}$ TO $\frac{1}{4}$ THE DEPTH OF THE SLAB. CUT TO BE SEALED WITH FLEXIBLE SEALANT AND BACKING ROD

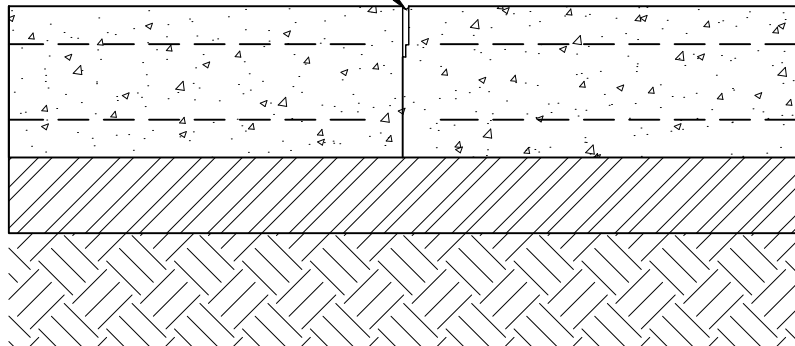

NOTES:

1. TRANSVERSE EXPANSION JOINTS SHALL BE PLACED AT 20m MAXIMUM SPACING.
2. TRANSVERSE CONTRACTION JOINTS TO BE PLACED AT 5m MAXIMUM SPACING.
3. BOND-BREAKING COMPONENT AND END CAP MAY BE REPLACED WITH A PURPOSE-MADE DOWEL SLEEVE.

SECTION 1:10

NOTE: ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED