


PLAN 1:100

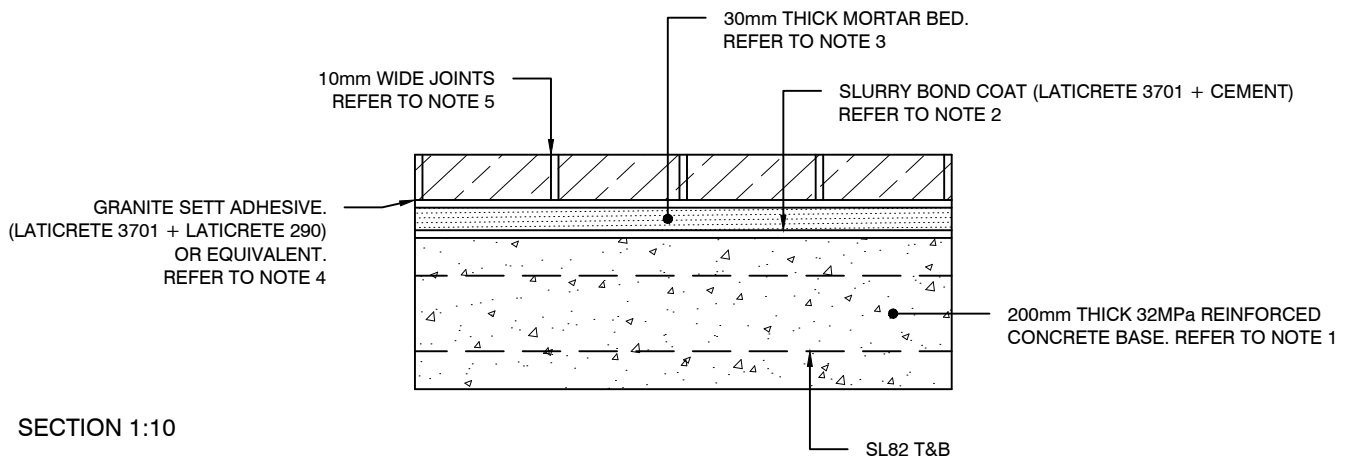

SECTION 1:10

NOTES:

1. SURFACE SHALL BE MADE PLUMB & TRUE WITHIN 3mm AND SHALL HAVE A WOODEN FLOAT FINISH.
2. MORTAR BED SHALL BE LAID WHILE THE SLURRY BOND COAT IS STILL WET & TACKY.
3. 30mm THICK MORTAR BEDDING FINISHED TO A WOOD FLOAT QUALITY. THE BEDDING SHALL BE OF MODIFIED MORTAR (3:1 SAND:CEMENT) MIXED WITH LATICRETE 3701 MORTAR ADMIX & LATICRETE 226 OR EQUIVALENT THICK BED MORTAR AS PER THE MANUFACTURER'S SPECIFICATIONS.
4. THE GRANITE SETTS SHALL BE ADHERED TO THE CURED BEDDING USING A MIX OF LATICRETE 290 PREMIUM MORTAR & LATICRETE 3701 MORTAR ADMIX AS PER THE MANUFACTURER'S SPECIFICATIONS.
5. USE MODIFIED MORTAR (3:1 SAND:CEMENT) MIXED WITH LATICRETE 3701 OR EQUIVALENT MORTAR ADMIX, LATICRETE 226 OR EQUIVALENT THICK BED MORTAR TO MATCH SETTS COLOUR.

NOTE: ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED