


FRONT ELEVATION

TOTAL 2 OFF


FRONT ELEVATION
(WITH DOOR REMOVED)

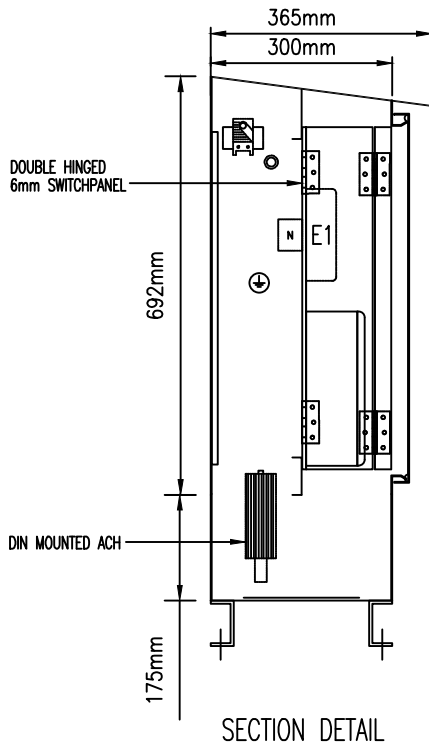

SECTION DETAIL

CONSTRUCTION NOTES:

- CABINET:** 1.5mm STAINLESS STEEL 316 GRADE
- DOOR:** 1.5mm STAINLESS STEEL 316 GRADE
- PLINTH:** 75mm x 38mm MILD STEEL CHANNEL
- ESCUTCHEON & GEAR PAN:** 1.5mm STAINLESS STEEL 316 GRADE
- GLAND PLATES:** 1.5mm STAINLESS STEEL 316 GRADE
- FORM OF SEGREGATION:** FORM 1
- DEGREE OF PROTECTION:** IP-66 - REFER TO WEATHER PROOFING DETAIL
- FAULT RATING:** 6kA
- FINISH:** DE-SCALE & DE-GREASE
- PREPARATION:** GRAIN FINISH
- EXTERNAL COLOUR:** GRAIN FINISH
- INTERNAL COLOUR:** GLOSS WHITE
- BRACKETS:** GLOSS WHITE
- PLINTH:** HOT DIP GALVANISED
- LABELS:** ENGRAVED PLASTIC LAMINATE
- FIXING:** DOUBLE SIDED ADHESIVE & SCREW FIXED
- COLOUR:** MAIN ISOLATOR - WHITE LETTERS ON BLACK
WARNING, FIRE & LIFTS - WHITE LETTERS ON RED
OTHERS - BLACK LETTERS ON WHITE
- CONTROL WIRING:** MINIMUM 1.5mm Cu V90
- WIRE MARKERS:** SMB HARVAL STANDARD FERRULES
- TERMINATIONS:** BARE CABLE ENDS, WHERE TERMINALS REQUIRE LUGS, BOOTLACE FERRULES OR PRE-INSULATED RING LUGS.
- COLOUR:** 240V AC - PHASE COLOURED
NEUTRAL - BLACK
EARTH - GREEN/YELLOW
AC CONTROL CIRCUIT ACTIVE- RED



WEATHER PROOFING DETAIL

NOTE:
TO BE READ IN CONJUNCTION WITH DRAWING 5.1.8
NOTE: ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED