


TEMPORARY RESTORATION FOR ALL ROAD AND FOOTPATH

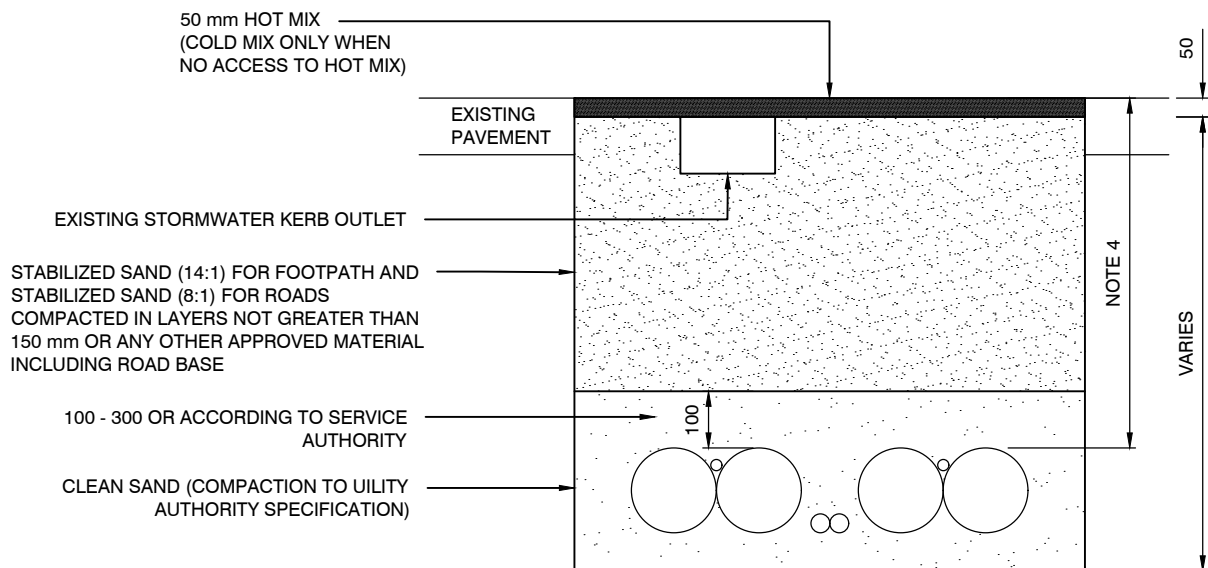

NOTES:

1. MINIMUM RESTORATION WIDTH 0.6 m FOR ASPHALT ROAD AND 1.0 m FOR CONCRETE ROAD
2. MINIMUM RESTORATION WIDTH 0.6 m FOR ASPHALT FOOTPATH AND 0.6 m FOR CONCRETE FOOTPATH
3. REFER TO ANNEXURE A OF SECTION B12 ROAD OPENINGS AND RESTORATION FOR MORE DETAILS.
4. FOR NEW SERVICES MINIMUM 1200 mm CLEARANCE FROM INVERT OF GUTTER.

NOTE: ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED